



9V BATTERY REPLACEMENT



STEP 1

Cut the 2 battery box wires and take off the battery box.

If it's glued, you perhaps should heat up or force it.



STEP 2


Strip the wire about 5mm long.

If you don't have such tool, you can find other method online (scissors...).



STEP 3

Grip the wire tips with a wrench, then plug them into the connector, with colour respect.

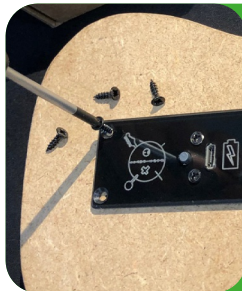

STEP 4

Place the Power Block Plug N Play and fix it with screws.


Plug... and Play !



MANUAL

Level display

Level can be check by plug, unplug the jack cable, or push the button.

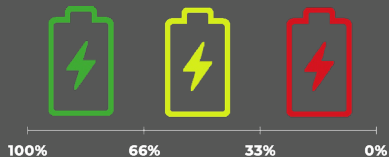

Usage

Plug jack = ON

Unplug jack = OFF

Plug USB = charging (end when blue light stop)



Charging

More informations at www.vaoodoo-audio.fr